



**ME 00**  
mancal tipo FLANGE  
serviço NORMAL

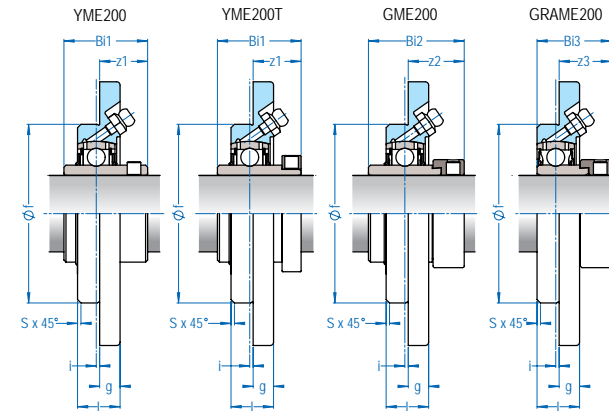

Caixa	Eixo		Dimensão nominal (mm)									Paraf.	Peso (kg)			D	Rolamentos					
	Ø pol	Ø mm	a	p	e	i	s	S	g	l	f		YME200	YME200T	GME200		GRAME200	Y 200 / Y 200 T	G 200	GRA 200		
															z1	Bi1	z2	Bi2	z3	Bi3		
ME 04	3/4	20	100	78,0	55,2	2,0	9,0	2	8,0	17,0	62,0	M8 5/16	0,50	0,60	0,50	47,0	16,3	31,0	24,5	43,5	21,4	30,9
ME 05	7/8 15/16 1	25	115	90,0	63,6	2,5	9,0	2	9,0	19,0	70,0	M8 5/16	0,80	0,80	0,70	52,0	17,2	34,0	24,4	44,3	20,9	30,9
ME 06	1-1/16 1-1/8 1-3/16 1-1/4	30	125	100,0	70,7	2,0	11,5	2	9,0	20,0	80,0	M10 3/8	1,00	1,10	1,00	62,0	20,2	38,1	28,1	48,3	24,7	35,7
ME 07	1-1/4 1-5/16 1-3/8 1-7/16	35	135	110,0	77,8	1,0	11,5	2	10,0	20,0	90,0	M10 3/8	1,40	1,50	1,50	72,0	24,4	42,9	31,3	51,1	28,4	38,9
ME 08	1-1/2	40	145	120,0	84,9	1,0	11,5	2	11,0	23,0	100,0	M10 3/8	1,70	1,90	1,70	80,0	29,2	49,2	33,9	56,3	31,7	43,7
ME 09	1-9/16 1-5/8 1-11/16 1-3/4	45	155	130,0	91,9	2,0	14,0	2	12,0	25,0	105,0	M12 1/2	2,00	2,20	1,90	85,0	28,2	49,2	32,9	56,3	30,7	43,7
ME 10	1-13/16 1-7/8 1-15/16 2	50	165	135,0	95,5	1,0	14,0	3	13,0	25,0	110,0	M12 1/2	2,40	2,60	2,20	90,0	31,6	51,6	37,1	62,7	31,7	43,7
ME 11	2 2-1/8 2-3/16	55	185	150,0	106,1	0,0	18,0	3	15,0	27,0	125,0	M16 5/8	3,50	3,80	3,00	100,0	33,4	55,6	43,6	71,3	36,4	48,4
ME 12	2-1/4 2-3/8 2-7/16	60	195	160,0	113,1	1,0	18,0	3	16,0	29,0	135,0	M16 5/8	4,30	4,70	3,40	110,0	38,7	65,1	45,8	77,7	38,6	53,1



# ME 00

mancal tipo FLANGE  
serviço NORMAL



Caixa	Eixo		Dimensão nominal (mm)									Paraf.	Peso (kg)			D	Rolamentos					
	Ø pol	Ø mm	a	p	e	i	s	S	g	l	f		YME200 YME200T	GME200	GRAME200		Y 200 / Y 200 T z1 Bi1	G 200 z2 Bi2	GRA 200 z3 Bi3			
ME 13	2-1/2	65	215	177,0	125,2	0,0	18,0	6	18,0	32,0	150,0	M16 5/8	5,40	5,70	-	120,0 125,0	39,7 44,4	65,1 74,6	51,6 -	85,7 -	-	-
ME 14	2-11/16 2-3/4	65 70	215	177,0	125,2	0,0	18,0	6	18,0	34,5	150,0	M16 5/8	5,40	6,00	-	125,0	44,4	74,6	51,6	85,7	-	-
ME 15	2-15/16 3	75	220	184,0	130,1	0,0	18,0	6	18,0	36,0	160,0	M16 5/8	5,90	6,50	-	130,0	44,5	77,8	54,8	92,1	-	-
ME 16	3-3/16	80	220	184,0	130,1	-2,0	18,0	6	18,5	33,0	160,0	M16 5/8	5,80	6,10	-	140,0	51,3	82,6	59,9	95,2	-	-
ME 18	3-1/2	90	265	220,0	155,6	-4,0	23,0	3	22,0	37,0	190,0	M20 3/4	10,00	9,20	-	160,0	60,3	96,0	50,5	69,5	-	-
ME 20	4	100	295	245,0	173,2	-4,0	23,0	3	24,0	40,0	210,0	M20 3/4	14,40	-	-	180,0	70,0	108,0	-	-	-	-
ME 24 <sup>(1)</sup>	-	120	350	295,0	208,6	5,0	27,0	3	26,0	42,0	250,0	M24 1	-	17,40	-	215,0	-	-	61,6	85,1	-	-

(1) - montado com rolamento G224S V22 FRM em lugar de G 200 V22 FRM;